



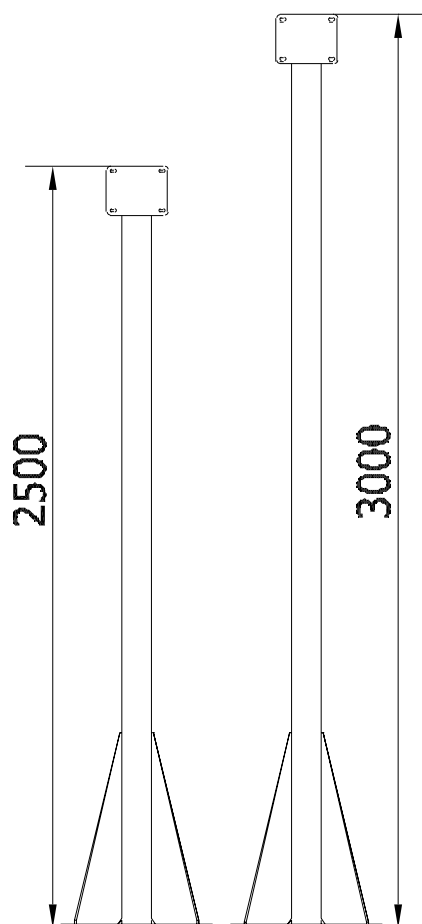


Floor pillars for suspension of Gram extraction arms type LGF, RGF, RFF and TGI:

- Max. extraction arm length:
Arm types excl. extension arm
- Available in following heights: 2500 and 3000mm
- Material: powder enamelled steel

Mounting plate for arm wall mounting:




Foot plate:
Hole size: $\varnothing 13\text{mm}$

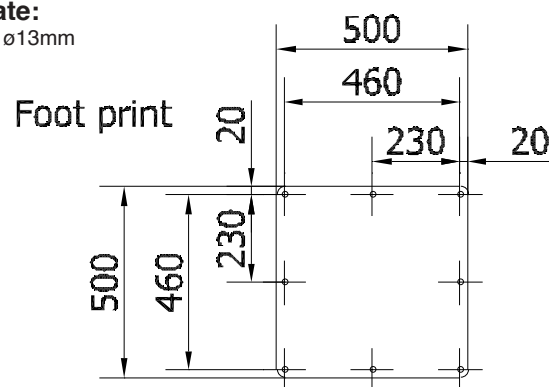

Item no.	Pillar thickness	Pillar height	Number arms	Foot type	Pillar seen from above
01 063 000	100 x 100	2500	1	Center	
01 064 000	100 x 100	3000	1	Center	
01 063 300	100 x 100	2500	2*	Center	
01 064 300	100 x 100	3000	2*	Center	
01 063 600	100 x 100	2500	1	Even back edge	
01 064 600	100 x 100	3000	1	Even back edge	

* Fittings placed 180° to each other.


Colour: RAL 9005 (structure)

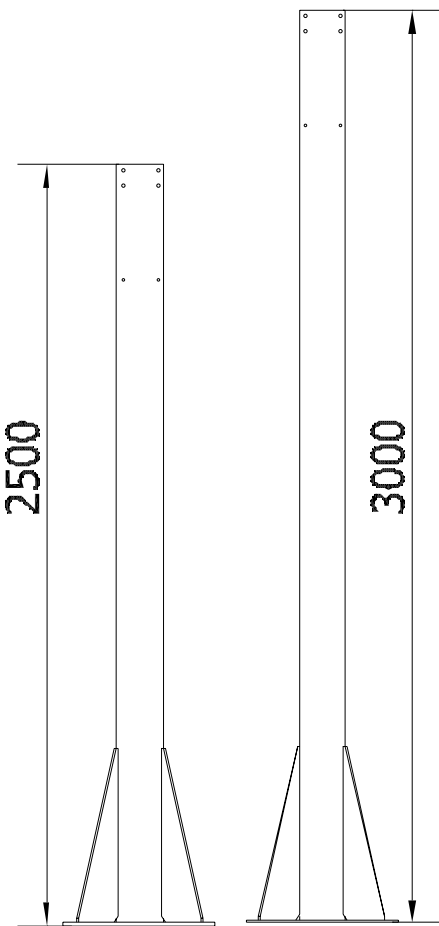


Floor pillars for suspension of Gram extraction arms type LGF, RGF, RFF and TGI as well as pivotal hood type LE and swing arm type VA:

- Extraction arm length: Arm types incl. extension arm
- Available in following heights: 2500 and 3000mm
- Material: powder enamelled steel

Mounting plate for arm wall mounting:

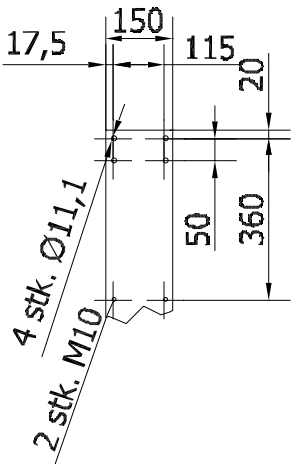

Foot plate:
Hole size: ø13mm

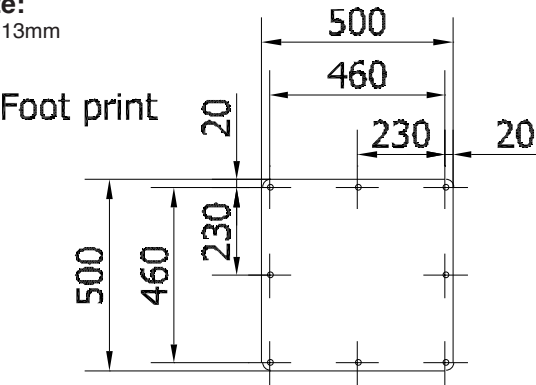

Item no.	Pillar thickness	Pillar height	Number arms	Foot type	Pillar seen from above
01 065 000	150 x 150	2500	1	Center	
01 066 000	150 x 150	3000	1	Center	
01 065 300	150 x 150	2500	2*	Center	
01 066 300	150 x 150	3000	2*	Center	
01 065 600	150 x 150	2500	1	Even back edge	
01 066 600	150 x 150	3000	1	Even back edge	

* Fittings placed 180° to each other.

Colour: RAL 9005 (structure)

Rev. 06.22 Data is subject to alterations