

**TP 3020**

- Mobile extraction arm
- With fan VT
- Fan wheel is made self-cleaning for minimal maintenance
- Trolley with 4 wheels, where 2 are turnable and fitted with brakes
- Arm type RGF available in length of 3m
- Arm can turn freely 360°
- With combined hose bracket/handle
- Low centre of gravity
- Suitable for changing workplaces (outlet to outside)

**Quick coupling**

Can be fitted with quick coupling for extension hose.

**Hood**

Hood is as standard fitted with damper. Automatic action switch and spotlight are available.

**Combination handle**

Handle can also be used as hose bracket.

**Counterweight**

Delivered with counterweight.

The arm is designed with outer bar system. This reduces wear, increases air flow and makes service and adjustment easier.


**Additional equipment**

Is available with hand-operated motor protection mounted in fitting incl. 5m cable with CE-plug 16A.

Colour: RAL 5007/7011/colour code 9965 silver (structure)




**Gram Clean Air A/S**  
www.GramCleanAir.com

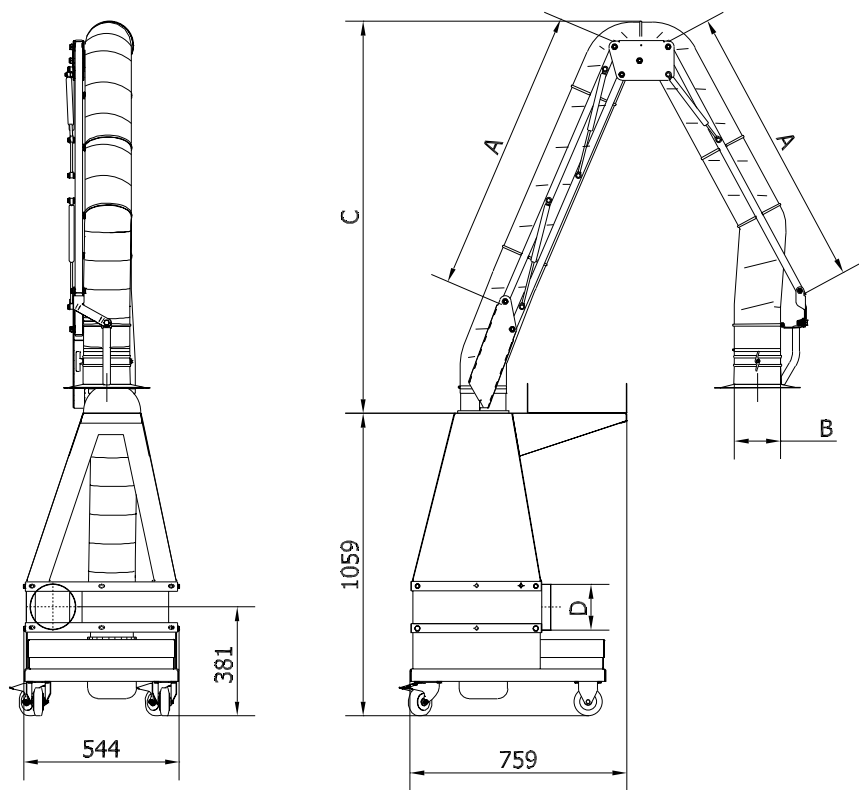

Type	Order no.	Arm	Fan	[kW]	[ø]	A	B	C	D	Max. outlet hose length [m]	Noise [db(A)]
TP 3020	01 606 600	RGF 3000	VT 2000	1.10	160	1000	ø161	1372	ø160	10	76

Range TP 3020 (ø160mm):

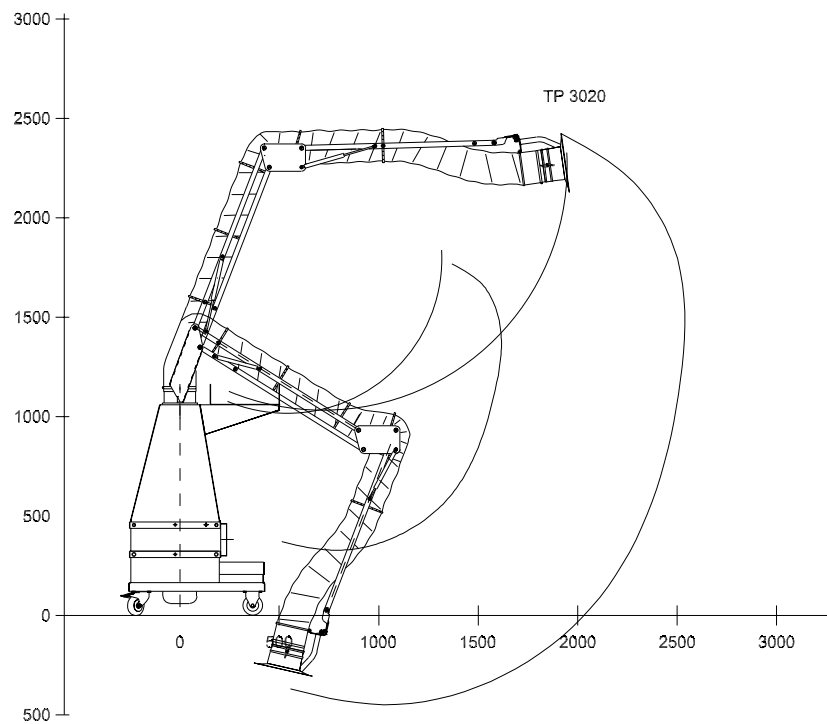

Arm can turn freely 360° in console.

Rev. 11.22 Data is subject to alterations