

WELDING / GRINDING CURTAINS AND LAMELLAS

Welding curtains and lamellas are tested according to DIN-norms. Are suitable in connection with all forms of welding and grinding.



Green, transparent

Risk factor 0.4

Efficient protection. For welding in direction of open areas.



DIN EN 1598



Mat dark green, non-transparent

Risk factor 0.05

Full protection. For screening between welders.



DIN EN 32504

DIN EN 1598



Red orange, transparent

Risk factor 0.8

Efficient protection. For welding in direction of open areas.



DIN EN 1598



Clear, transparent

Efficient protection.
For use in connection with grinding.



Gram welding curtains and lamellas are made in tear resistant and flame retardation material that are cold resistant down to -20°C. They filter dangerous UV and infrared radiation according to DIN EN 1598 and are delivered standard with thickness of 0.4mm. Other thicknesses are available.

Whole welding curtains:

- Width: 1300 or 2000mm
- 7 or 10 reinforced eyelets per curtain
- With folded edges
- Press-buttons for connecting several curtains
- Flexible design possible
- Optimal protection
- Ideal in noise protection partition combination



Cabine design example with green welding curtain and C-rails.

Welding curtain and lamellas are delivered without spring and PA hooks.

Lamellas:

- Width: 465mm
- 4 reinforced eyelets per lamella
- Easy exchange of single lamellas
- Easy passage (overlap 65mm at suspension)
- Large freedom of movement
- Optimal protection
- Many applications - i.e. also gate openings (thickness ≥ 1 mm)
- Flexible design possible
- Ideal in noise protection partition combination
- Are available against additional payment in thickness 1, 2 and 3mm (5mm only clear)



Gram Clean Air A/S
www.GramCleanAir.com

7.CURT1


WELDING / GRINDING CURTAINS AND LAMELLAS

Whole welding curtains 1300mm (Thickness: 0.4mm):

Picture	Description	Height	Width	Weight/piece [kg]	Number spring hooks	Order no.
	Dark green, mat, non-transparent	1800	1300	1.45	7	07 111 100
		2200	1300	1.75		07 111 200
		Special height*		0.6 kg/m ²		07 111 350
	Green, transparent	1800	1300	1.45	7	07 113 100
		2200	1300	1.75		07 113 200
		Special height*		0.6 kg/m ²		07 113 350
	Red orange, transparent	1800	1300	1.45	7	07 117 100
		2200	1300	1.75		07 117 200
		Special height*		0.6 kg/m ²		07 117 350
	Clear, transparent	1800	1300	1.45	7	07 119 100
		2200	1300	1.75		07 119 200
		Special height*		0.6 kg/m ²		07 119 350

* Minimum height: 1m

Product	Description	Order no.
Spring hooks	For max. 1" pipe	07 143 000
PA hooks	For C-rail	07 144 000
Boogie-runner	For C-rail	07 144 500

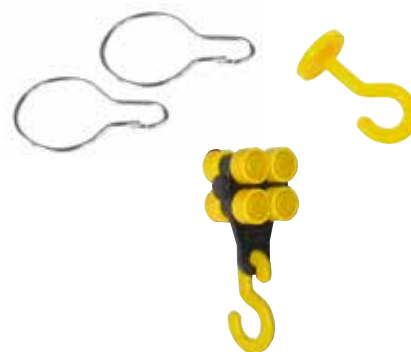

WELDING / GRINDING CURTAINS AND LAMELLAS

DO NOT FORGET at selection of welding curtains and lamellas to take curtain folders into account (+10% in width)

Whole welding curtains 2000mm (Gods: 0.4mm):

Picture	Description	Height	Width	Weight/piece [kg]	Number spring hooks	Order no.
	Dark green, mat, non-transparent	1800	2000	2,15	10	07 160 100
		2200	2000	2,65		07 160 200
	Green, transparent	1800	2000	2,15	10	07 162 100
		2200	2000	2,65		07 162 200
	Red orange, transparent	1800	2000	2,15	10	07 164 100
		2200	2000	2,65		07 164 200
	Clear, transparent	1800	2000	2.15	10	07 168 100
		2200	2000	2.65		07 168 200

Special sizes of whole welding curtains:

Incl. reinforced edges and press-bottoms side
Wall thickness: 0.4mm

Max. size: approx. 5m x 5m - however only 20m². (Eyelets closest to ends are placed 25mm from edge and the rest with 210mm interspace)

Description	Weight/m ²	Unit	Order no..
 Dark green, mat	0.6 kg	m ²	07 180 000
 Green, transparent	0.6 kg	m ²	07 181 000
 Red orange, transparent	0.6 kg	m ²	07 183 000
 Clear, transparent	0.6 kg	m ²	07 184 000

Rev. 12.16
Data is subject to alterations

Marked items are standard goods



Gram Clean Air A/S
www.GramCleanAir.com

7.CURT3

WELDING / GRINDING CURTAINS AND LAMELLAS

Lamallas (Thickness: 0,4mm):

Farbe	Description	Height	Width	Number spring hooks	Order no.
	Dark green, mat, non-transparent	1800	465	4	07 151 150
		2200	465		07 151 250
	Green, transparent	1800	465	4	07 153 150
		2200	465		07 153 250
	Red orange, transparent	1800	465	4	07 157 150
		2200	465		07 157 250
	Clear, transparent	1800	465	4	07 159 150
		2200	465		07 159 250

Complete width to be screened	Number lamellas*	Number PA hooks/ spring hooks
465	1	4
865	2	7
1265	3	10
1665	4	13
2065	5	16
2465	6	19
2865	7	22
3265	8	25
3665	9	28
4065	10	31
4465	11	34
4865	12	37
5265	13	40
5665	14	43
6065	15	47
6465	16	50

* First and last eyelet should overlap.

Product	Description	Order no.
Spring hooks	For max. 1" pipe	07 143 000
PA hooks	For C-rail	07 144 000
Boogie-runner	For C-rail	07 144 500

